

4m - 7m Moog Crawler Mounted Platform

CR 1

Designed to get onto the narrowest of structures, this lightweight platform accommodates up to two operators and is ideal for inspections, maintenance, and repair work. Perfect for jetties, bridge walkways, pedestrian bridges, timber bridges, weight-restricted bridges, and single-lane bridges, it delivers fast setup and pack-up to keep your project moving. A generator is included at no extra cost, so you're ready to get to work from day one.


Machine Specs

Max Platform length under bridge	4m - 7 m
Max Platform length alongside bridge	4 m
Max lowering depth	4.4 m
Width of platform	1 m
Side walk clearance	1 m
Hand rail / Barrier max clearance	2.2 m
Operational footprint	1.7 m
Max load at end of telescopic platform	150 kg
Safe working load across platform	300 kg
Rotation of platform under bridge	180° degrees
Deployment side	Left and right

Truck Specs

Traveling height (stowed)	2 m
Traveling width	1.7 m
Traveling length	4 m
Overall weight (approx)	3,700 kg

m = Metre
kg = Kilogram

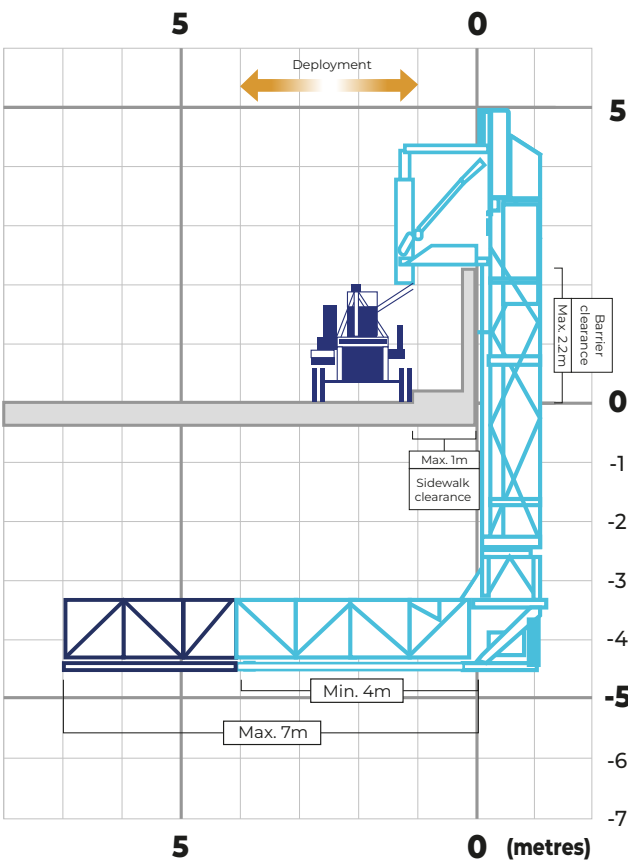

Included Accessories:

Equipment installed on unit available for client usage.

- Generator 18KVA : Three-Phase

